

Cavity fixing

HRM

Advantages



HRM 4, 5, 6

HRM 8

- Suitable for fixings on boards like gypsum boards or chipboards, but also in hollow ceilings for example
- After successful installation, the anchor expands over a large area, resulting in high load values
- Mounting with installation pliers MZA 100, cordless screwdriver and screwdriver possible; the installation pliers is recommended for a quick and controlled installation
- Not flammable according to DIN EN 13501-1, class A1


Suitable building materials

Very suitable



- Cavity ceilings
- Cavity walls
- Plasterboard/
Fibreboard
- Chipboard

Suitable to a limited extent




- Hollow bricks with large chambers





Mounting

Mounting with installation plier (recommended)



Mounting without installation plier

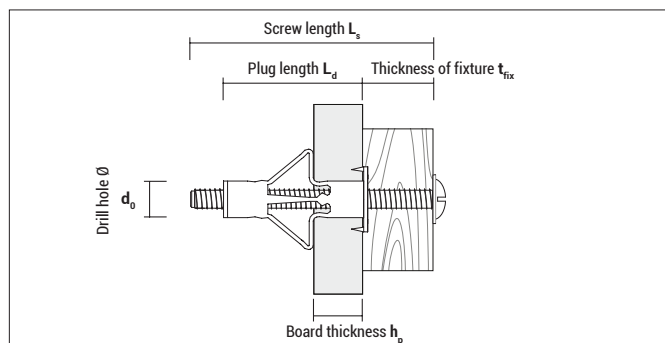

Installation plier MZA 100 for HRM



Type	Art-No	€/ pcs	 [pcs]	 [pcs]
MZA 100	9MZA00		1	—

Cavity plug metal HRM



HRM

Type	Art-No	d ₀ [mm]	h _{p min-max} [mm]	Thread	L _s [mm]	L _d [mm]	t _{fix} [mm]	€ / 100 pcs	[pcs]	[pcs]
small pack (with viewing window)	HRM 4-20	9420HRM50	8	3 - 18	M4	52	46	43 - 28	50	1.350
	HRM 4-24	9424HRM50	8	18 - 24	M4	58	52	34 - 28	50	1.350
	HRM 4-38	9438HRM50	8	32 - 38	M4	72	66	34 - 28	50	1.350
	HRM 5-16	9516HRM50	11	3 - 16	M5	58	52	49 - 36	50	1.350
	HRM 5-32	9532HRM25	11	14 - 32	M5	71	65	51 - 33	25	675
	HRM 5-45	9545HRM25	11	32 - 45	M5	88	80	48 - 35	25	675
	HRM 6-16	9616HRM25	13	3 - 16	M6	58	52	49 - 36	25	675
	HRM 6-32	9632HRM25	13	14 - 32	M6	71	65	51 - 33	25	675
	HRM 6-45	9645HRM25	13	32 - 45	M6	88	80	48 - 35	25	675
	HRM 8-16*	9816HRM25	13	3 - 16	M8	61	53	50 - 37	25	675
craftsman pack	HRM 8-32*	9832HRM20	13	16 - 32	M8	73	66	50 - 34	20	540
	HRM 4-20	9420HRM	8	3 - 18	M4	52	46	43 - 28	100	1.000
	HRM 4-24	9424HRM	8	18 - 24	M4	58	52	34 - 28	100	1.000
	HRM 4-38	9438HRM	8	32 - 38	M4	72	66	34 - 28	100	1.000
	HRM 5-16	9516HRM	11	3 - 16	M5	58	52	49 - 36	100	500
	HRM 5-32	9532HRM	11	14 - 32	M5	71	65	51 - 33	100	500
	HRM 5-45	9545HRM	11	32 - 45	M5	88	80	48 - 35	100	900
	HRM 6-16	9616HRM	13	3 - 16	M6	58	52	49 - 36	100	500
	HRM 6-32	9632HRM	13	14 - 32	M6	71	65	51 - 33	100	900
	HRM 6-45	9645HRM	13	32 - 45	M6	88	80	48 - 35	100	600
	HRM 8-16*	9816HRM	13	3 - 16	M8	61	53	50 - 37	100	300
	HRM 8-32*	9832HRM	13	16 - 32	M8	73	66	50 - 34	100	300

* Hex-head screw, SW 13



Blister HRM



Type	Art-No	d ₀ [mm]	h _{p min-max} [mm]	Thread	L _s [mm]	L _d [mm]	Type of screw	€ / Blister	 [pcs]	 [Blister]
4-20	5420HRM5	8	3 - 18	M4	52	46			5	10
4-24	5424HRM5	8	18 - 24	M4	58	52			5	10
5-16	5516HRM5	11	3 - 16	M5	58	52			5	10
5-16 RH	5516HRMRH4	11	3 - 16	M5	58	52			4	10
5-16 WH	5516HRMWH4	11	3 - 16	M5	58	52			4	10
5-32	5532HRM5	11	14 - 32	M5	71	65			5	10
5-32 RH	5532HRMRH4	11	14 - 32	M5	71	65			4	10
5-32 WH	5532HRMWH4	11	14 - 32	M5	71	65			4	10
6-16	5616HRM5	13	3 - 16	M6	58	52			5	10
6-32	5632HRM5	13	14 - 32	M6	71	65			5	10

Loads F_{rec}

Type	Plasterboard					
	Plywood 6 mm F _{rec} [kN]	Chipboard 16 mm F _{rec} [kN]	h _p = 9,5 mm F _{rec} [kN]	h _p = 12,5 mm F _{rec} [kN]	h _p = 2 x 12,5 mm F _{rec} [kN]	h _p = 3 x 12,5 mm F _{rec} [kN]
HRM 4-20	0,15	0,25	0,15	0,15	—	—
HRM 4-24	—	—	—	—	0,15	—
HRM 4-38	—	—	—	—	—	0,25
HRM 5-16	0,20	0,25	0,20	0,20	—	—
HRM 5-32	—	—	—	—	0,35	—
HRM 5-45	—	—	—	—	—	0,35
HRM 6-16	0,25	0,30	0,25	0,25	—	—
HRM 6-32	—	—	—	—	0,35	—
HRM 6-45	—	—	—	—	—	0,40
HRM 8-16	0,30	0,40	0,25	0,25	—	—
HRM 8-32	—	—	—	—	0,40	—

F_{rec}: Recommended loads incl. safety factor of 3