

25 SERIES HC25CBxRx-V



Fixed Bullet



MFZ Bullet

2/4/5/8MP - IR Fixed / MFZ Bullet, Dual Light Color Cameras

3 YEAR
WARRANTY

ONVIF® | SGT M

OPERATIONAL	
RAM	HC25CB2Rx-V/HC25CB4Rx-V: 1 Gigabit HC25CB5Rx-V/HC25CB8Rx-V: 2 Gigabits
Flash	2 Gigabits
Video Standard	NTSC/PAL
Scanning System	Progressive
Image Sensor	HC25CB2Rx-V/HC25CB4Rx-V: 1/3" HC25CB5Rx-V/HC25CB8Rx-V: 1/2.7"
Sensor Size (H x V)	HC25CB2Rx-V: 5.184 mm x 2.196 mm HC25CB4Rx-V: 5.120 mm x 2.880 mm HC25CB5Rx-V/HC25CB8Rx-V: 5.76 mm x 3.24 mm
Number of Pixels (H x V)	HC25CB2Rx-V: 1920 x 1080 HC25CB4Rx-V: 2560 x 1440 HC25CB5Rx-V: 2880 x 1620 HC25CB8Rx-V: 3840 x 2160
Minimum Illumination (Color/BW)	HC25CB2Rx-V: Color: 0.0045 Lux@30IRE, F1.6 BW: 0 Lux (IR LED ON) HC25CB4Rx-V: Color: 0.007 Lux@30IRE, F1.6 BW: 0 Lux (IR LED ON) HC25CB5Rx-V: Color: 0.009 Lux@30IRE, F1.6 BW: 0 Lux (IR LED ON) HC25CB8Rx-V: Color: 0.02 Lux@30IRE, F1.6 BW: 0 Lux (IR LED ON)
S/N Ratio	55 dB
Electronic Shutter Speed	1/5 to 1/20,000 s
IR Distance	HC25CB2R1-V: IR up to 30 m (98.4 ft), Warm Light up to 20 m (65.6 ft) HC25CB2R2-V: IR up to 40 m (131.2 ft), Warm Light up to 20 m (65.6 ft) HC25CB4R1-V/HC25CB5R1-V/HC25CB8R2-V: IR up to 30 m (98.4 ft), Warm Light up to 15 m (49.2 ft) HC25CB4R2-V/HC25CB5R2-V/HC25CB8R1-V: IR up to 40m (131.2ft), Warm Light up to 15 m (49.2 ft)
IR Light Control	Smart/Manual/Intelligent/OFF
IR Light Number	4
Day/Night	Auto / Day Mode / Night Mode / Timing
Backlight Compensation	HC25CB2Rx-V/HC25CB4Rx-V: WDR, BLC, HLC, LDC HC25CB5Rx-V/HC25CB8Rx-V: WDR, BLC, HLC
White Balance	Auto / Tungsten / Fluorescent / Daylight / Shadow / Manual
Gain Control	0 ~ 100%
Wide Dynamic Range	HC25CB2Rx-V: 80 dB HC25CB4Rx-V: 90 dB HC25CB5Rx-V/HC25CB8Rx-V: 120 dB
Noise Reduction	2D / 3D DNR
Lens	HC25CB2R2-V/HC25CB5R2-V/HC25CB8R2-V/ HC25CB4R2-V: 2.7-13.5 mm, F1.6, MFZ HC25CB2R1-V/HC25CB4R1-V/HC25CB5R1-V/HC- 25CB8R1-V: 2.8mm, F1.6
Angle of View (H x V)	HC25CB2R1-V/HC25CB4R1-V: H: 96°, V: 53° HC25CB2R2-V/HC25CB4R2-V: H: 90.4°(Wide)~29°(Tele), V: 48.1°(Wide)~16.3°(Tele) HC25CB5R1-V/HC25CB8R1-V: H: 110°, V: 59.6° HC25CB5R2-V: H: 102°(Wide)~32.7°(Tele) V: 54.5°(Wide)~18.4°(Tele) HC25CB8R2-V: H: 102°(Wide)~33.2°(Tele) V: 54.5°(Wide)~18.5°(Tele)
Privacy Masking	Off/On (4 Areas)
Defog	Supported
Local Storage	Micro SD (up to 1 TB)
Alarm Inputs / Outputs	HC25CB5Rx-V/HC25CB8Rx-V: 1In / 1 Out
Pan Range	0° ~ 360°

Tilt Range	0° ~ 90°
Rotation Range	0° ~ 360°
VIDEO	
Video Compression	H.265 HEVC/H.264/MJPEG, Smart Codec
Resolution	HC25CB2R1-V/HC25CB2R2-V: Stream 1 1920 x 1080, 1280 x 720 Stream 2 704 x 576(PAL)/704 x 480(NTSC), 640 x 360, 480 x 360, 352 x 288(PAL)/352 x 240(NTSC) HC25CB4R1-V/HC25CB4R2-V: Stream 1 2560 x 1440, 2304 x 1296, 1920 x 1080, 1280 x 720 Stream 2 704 x 576(PAL)/704 x 480(NTSC), 640 x 360, 480 x 360, 352 x 288(PAL)/352 x 240(NTSC) HC25CB5R1-V/HC25CB5R2-V: Stream 1 2880 x 1620/2592 x 1520/1920 x 1080/1280 x 720 Stream 2 704 x 576(PAL)/704 x 480(NTSC)/640 x 480/352 x 288(PAL)/352 x 240(NTSC) Stream 3 640 x 480/352 x 288(PAL)/352 x 240(NTSC)/320 x 240 HC25CB8R1-V/HC25CB8R2-V: Stream 1 3840 x 2160, 2880 x 1620, 2592 x 1520, 2560 x 1440, 2304 x 1296, 1920 x 1080, 1280 x 720 Stream 2 704 x 576(PAL) / 704 x 480(NTSC) / 640 x 480 / 352 x 288(PAL) / 352 x 240(NTSC) Stream 3 640 x 480/352 x 288(PAL) / 352 x 240(NTSC) / 320 x 240
Number of Video Streams	HC25CB2Rx-V/HC25CB4Rx-V: 2 HC25CB5Rx-V/HC25CB8Rx-V: 3
Frame Rate Main Stream	HC25CB2Rx-V/HC25CB4Rx-V/HC25CB5Rx-V: H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max 12fps HC25CB8Rx-V: H.264/H.265: MAX 25fps (WDR on 20fps) MJPEG: Max 12fps
Frame Rate Second Stream	HC25CB2Rx-V/HC25CB4Rx-V/HC25CB5Rx-V: H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max 12fps HC25CB8Rx-V: H.264/H.265: MAX 25fps (WDR on 20fps) MJPEG: Max 12fps
Frame Rate Third Stream	HC25CB5Rx-V: H.265/H.264: Max. 30fps/25fps(60Hz/50Hz) MJPEG: Max 12fps HC25CB8Rx-V: H.264/H.265: MAX 25fps (WDR on 20fps) MJPEG: Max 12fps

Honeywell


25 SERIES 2 / 4 / 5 / 8 MP - IR FIXED / MFZ BULLET, DUAL LIGHT COLOR CAMERAS

Bit Rate	HC25CB2Rx-V: H.264/H.265 1920 × 1080, 1280 × 720 @25/30fps 500-4096kbps 704 × 576(PAL)/704 × 480(NTSC) @25/30fps 128-4096kbps 640 × 360, 480 × 360, 352 × 288(PAL)/352 × 240(NTSC) @25/30fps 128-1500kbps MJPEG 1920 × 1080, 1280 × 720 @12fps 500-4096kbps 704 × 576(PAL)/704 × 480(NTSC) @12fps 128-4096kbps 640 × 360, 480 × 360, 352 × 288(PAL)/352 × 240(NTSC) @12fps 128-1500kbps	
	HC25CB4Rx-V: H.264/H.265 2560 × 1440, 2304 × 1296, 1920 × 1080, 1280 × 720 @25/30fps 500-4096kbps 704 × 576(PAL)/704 × 480(NTSC) @25/30fps 100-4096kbps 640 × 360, 480 × 360, 352 × 288(PAL)/352 × 240(NTSC) @25/30fps 100-1500kbps MJPEG 1920 × 1080, 1280 × 720 @12fps 500-4096kbps 704 × 576(PAL)/704 × 480(NTSC) @12fps 100-4096kbps 640 × 360, 480 × 360, 352 × 288(PAL)/352 × 240(NTSC) @12fps 100-1500kbps	
	HC25CB5Rx-V: H.264/H.265 2880 × 1620, 2592 × 1520, 1920 × 1080 @25/30fps 500-8000kbps 1280 × 720 @25/30fps 200-8000kbps 704 × 576(PAL)/704 × 480(NTSC) @25/30fps 100-6000kbps 640 × 480 @25/30fps 100-3000kbps 352 × 288(PAL)/352 × 240(NTSC), 320 × 240 @25/30fps 100-1500kbps MJPEG 1920 × 1080 @12fps 500-8000kbps 1280 × 720 @12fps 200-8000kbps 704 × 576(PAL)/704 × 480(NTSC) @12fps 100-6000kbps 640 × 480 @12fps 100-3000kbps 352 × 288(PAL)/352 × 240(NTSC), 320 × 240 @12fps 100-1500kbps	
	HC25CB8Rx-V: H.264/H.265 3840 × 2160, 2880 × 1620, 2592 × 1520, 2560 × 1440, 2304 × 1296, 1920 × 1080 @25fps (WDR on 20fps) 500-8000kbps 1280 × 720 @25fps (WDR on 20fps) 200-8000kbps 704 × 576(PAL)/704 × 480(NTSC) @25fps (WDR on 20fps) 100-6000kbps 640 × 480 @25fps (WDR on 20fps) 100-3000kbps 352 × 288(PAL)/352 × 240(NTSC), 320 × 240 @25fps (WDR on 20fps) 100-1500kbps MJPEG 1920 × 1080 @12fps 500-8000kbps 1280 × 720 @12fps 200-8000kbps 704 × 576(PAL)/704 × 480(NTSC) @12fps 100-6000kbps 640 × 480 @12fps 100-3000kbps 352 × 288(PAL)/352 × 240(NTSC), 320 × 240 @12fps 100-1500kbps	
	AUDIO	
	Audio Compression	G711ALAW, G711ULAW, RAWPCM
	Audio Stream	HC25CB2Rx-V/HC25CB4Rx-V: 1-way, audio input HC25CB5Rx-V/HC25CB8Rx-V: 2-way, full duplex
	Audio Interface	HC25CB2Rx-V/HC25CB4Rx-V: Built-in Mic HC25CB5Rx-V/HC25CB8Rx-V: 1 Line In / 1 Line Out, Built-in Mic
	NETWORK	
	Ethernet	10 Base-T/100 Base-TX Ethernet (RJ-45)
Supported Web Browsers	Chrome, Firefox, Microsoft Edge	
Supported OS	Microsoft Windows 10, 11	
Protocols*	IPv4, IPv6, TCP / IP, HTTP, HTTPS, UPnP, RTSP / RTP / RTCP, IGMP / Multicast, SMTP, DHCP, NTP, DNS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, TLS/SSL, FTP/SFTP/FTPS, DDNS, Bonjour, System Log	
Interoperability	ONVIF Profile S, G, T, M	
Maximum Users Access	10 Users	
Security	User account and password protection, HTTPS, IP Filter, Digest authentication, TLS1.3, Stream encryption, AES128 /256, SSH / Telnet closed OS / Firmware Protect, Firmware encryption User authentication Digest Authentication, Prevent brute-force attack Network authentication 802.1X Authentication(EAP-TLS) Audit User Access/System/Event log management Secure Storage SD card partition encryption Secure Boot	
Languages Supported	Arabic, Chinese (Traditional), Czech, Dutch, English, French, German, Italian, Japanese, Korean, Polish, Portuguese (Brazil), Spanish, Turkish	

EVENTS/ANALYTICS	
Video Analytics	HC25CB2Rx-V/HC25CB4Rx-V: Motion detection, Smart motion, Scene change, Intrusion, Line crossing HC25CB5Rx-V/HC25CB8Rx-V: Motion detection, Smart motion, Scene change, Intrusion, Multi loitering, People counter, Line crossing detection, Face detection, Unattended object, MissingObject, Multi-Object detection
Event Type	HC25CB2Rx-V/HC25CB4Rx-V: Analytics alarm, Security alarm, Disk alarm, Recording alarm, Audio detection, Illegal access alarm HC25CB5Rx-V/HC25CB8Rx-V: Analytics alarm, Security alarm, SD Card Alarm, Recording alarm, Alarm input, Audio Detection, Illegal Access Alarm
Event Linkage	HC25CB2Rx-V/HC25CB4Rx-V: SMTP, Alarm record, FTP Uploading HC25CB5Rx-V/HC25CB8Rx-V: SMTP, Alarm record, FTP Uploading, Alarm Output, Audio Output
Region of Interest	8
ELECTRICAL	
Power Supply	DC12V=1A; or PoE 44-57V=, 350mA
Power Consumption (Max)	HC25CB2R1-V: Max.6.5 W HC25CB2R2-V: Max.6.3 W HC25CB4R1-V: Max.6.4 W HC25CB4R2-V: Max.6.6 W HC25CB5R1-V: Max.5.5 W HC25CB5R2-V: Max. 6.2 W HC25CB8R1-V: Max.5.7 W HC25CB8R2-V: Max.6.5 W
MECHANICAL	
Dimensions	193.8 × Ø87.0 × Ø87.0 mm (7.63 × Ø3.43 × Ø3.43 inch)
Product Weight	HC25CB2R1-V/HC25CB4R1-V: 0.52 kg (1.15 lb) HC25CB2R2-V: 0.55 kg (1.21 lb) HC25CB4R2-V/HC25CB5R1-V/HC25CB8R1-V: 0.54 kg (1.19 lb) HC25CB5R2-V: 0.53 kg (1.17 lb) HC25CB8R2-V: 0.56 kg (1.23 lb)
Package Weight	HC25CB2R1-V/HC25CB4R1-V: 0.66 kg (1.46 lb) HC25CB2R2-V: 0.69 kg (1.52 lb) HC25CB4R2-V: 0.67 kg (1.48 lb) HC25CB5R1-V: 0.74 kg (1.63 lb) HC25CB5R2-V: 0.71 kg (1.57 lb) HC25CB8R1-V: 0.68 kg (1.5 lb) HC25CB8R2-V: 0.69 kg (1.52 lb)
Body Material	Metal
Color	White (RAL9003)+Black
ENVIRONMENTAL	
Operating Temperature	HC25CB2Rx-V/HC25CB4Rx-V: -25°C ~ 55°C (-13°F ~ 131°F) HC25CB5Rx-V/HC25CB8Rx-V: -30°C ~ 60°C (-22°F ~ 140°F)
Relative Humidity	Less than 90 %, non-condensing
Ingress Protection	IP66
Impact Resistance	IK10 Housing
REGULATORY	
Emissions	FCC Part15B, ICES-003, CE EN5032, Complies with UKCA and RCM
Immunity	CE(EN 50130-4, EN 55035), Complies with RCM and UKCA
Safety	CE(EN 62368-1), RCM(AS/NZS 62368.1), Complies with UKCA
RoHS	CE(EN 63000), UAE(Cabinet Decree No.10 of 2017)
Country of Origin	Vietnam
Warranty	3 year

* Some development may be required in specific user cases to support some of these protocols in the field as they mature over time.

25 SERIES 2/4/5/8 MP - IR FIXED / MFZ BULLET, DUAL LIGHT COLOR CAMERAS DIMENSIONS

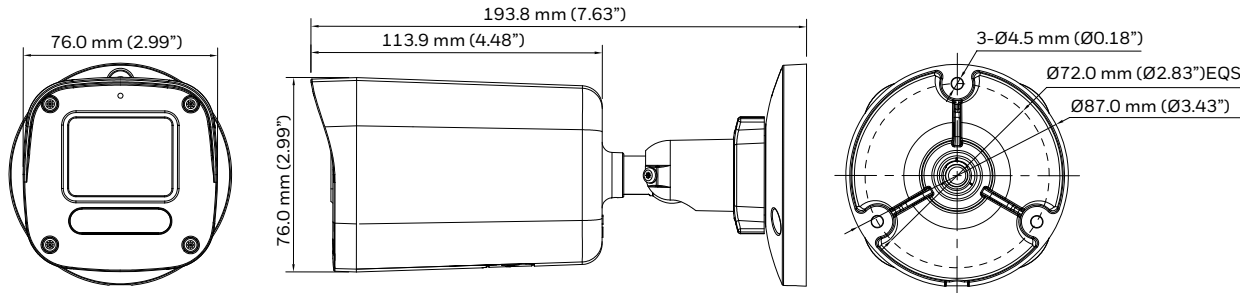

SYSTEM COMPATIBILITY & RECOMMENDED ACCESSORIES

SYSTEM COMPATIBILITY		OPTIONAL MOUNTS AND ACCESSORIES*	
MAXPRO NVR HE	Up to 256 IP channels RAID5/6 enterprise NVR	HA35PMC03	35S fixed camera cap, 1.5NPT male
MAXPRO NVR PE	Up to 192 IP channels RAID5/6 enterprise NVR	HA35CLM01	35S ceiling mount base with adapter
MAXPRO NVR SE	Up to 96 IP channels system NVR	HA35CLM02	35S ceiling mount pendent extension, 252mm
MAXPRO NVR XE	Up to 24 IP channels system NVR	HA35JCBHBA	35S bullet junction box
MAXPRO NVR Software	Up to 256 IP channels recording software	HA35PLM01	35S pole mount bracket
Milestone	Honeywell - Milestone Plug in	HA35CNM01	35S corner mount bracket
25 Series NVR	4/8/16-channel 25 series NVRs		
35 Series NVR	4/8/16/32/64-channel 35 series NVRs		

* Mounting accessories, unless otherwise noted, are not included with camera and must be ordered separately. Please refer to the cross reference matrix or accessories datasheet for detailed information.

ORDERING

ORDERING		ORDERING	
HC25CB2R1-V	25S 2MP IR Fixed Bullet, 2.8 mm, Dual light color, PoE, COO Vietnam	HC25CB5R1-V	25S WDR 5 MP IR Fixed Bullet, 2.8 mm, Dual light color, PoE, COO Vietnam
HC25CB2R2-V	25S 2MP IR MFZ Bullet, 2.7-13.5 mm, Dual light color, PoE, COO Vietnam	HC25CB5R2-V	25S WDR 5 MP IR MFZ Bullet, 2.7-13.5 mm, Dual light color, PoE, COO Vietnam
HC25CB4R1-V	25S 4MP IR Fixed Bullet, 2.8 mm, Dual light color, PoE, COO Vietnam	HC25CB8R1-V	25S WDR 8 MP IR Fixed Bullet, 2.8 mm, Dual light color, PoE, COO Vietnam
HC25CB4R2-V	25S 4MP IR MFZ Bullet, 2.7-13.5 mm, Dual light color, PoE, COO Vietnam	HC25CB8R2-V	25S WDR 8 MP IR MFZ Bullet, 2.7-13.5 mm, Dual light color, PoE, COO Vietnam

For More Information

hwll.co/securityUK

Building Automation

Commercial Security
Building 5 Carlton Park
King Edward Avenue
Narborough, Leicester
LE19 0LF

Tel: +44 (0)1163 500714

www.honeywell.com



HEVCAdvance™

ONVIF and the ONVIF logo are trademarks of ONVIF Inc.
HEVC Advance logo is a trademark of HEVC Advance.
Honeywell reserves the right, without notification, to make changes in product design or specifications.

HBA-SEC-25S-HC25CBxRx-V-DS-UK-EN-02-2026-V01-Y
© 2026 Honeywell International Inc.

Honeywell